



# PREMIUM RANGE 5 IN 1 REMOTE CONTROL

911-919 - 5 IN 1 REMOTE (4 Zone)

## PRODUCT DATASHEET


5 in 1 Remote - 4 Zone for 2.4Ghz Controllers

### Areas of application

- Direct LED strips
- LED indoor lighting
- LED decorative lighting
- LED building lighting

### Product Features

- Four Zone RF Remote Control
- Control range up to 20m
- DIM/CCT/RGB/RGBW/RGB+CCT
- Supplied with 2\*AAA batteries, and wall mounting
- 3 Years Warranty

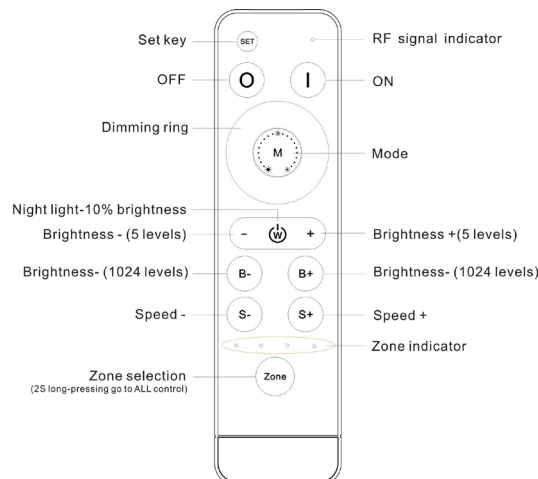

Agios Adrianos, 21100 Nafplio Greece / Europe  
Tel. +302752 091136 | [elmasco@elmasco.eu](mailto:elmasco@elmasco.eu) | [www.elmasco.eu](http://www.elmasco.eu)



## TECHNICAL DATA

### Main Parameters

Supply Voltage	DC 3V (AAA*2)
Working Current	<25mA
RF Distance	20m
RF Frequency	2.4 GHz
Operating Temperature	-20 to +60 °C
Output	4 Zones

Ingress Protection	IP44
Protection Class	II
Dimensions	L150*W40*H20mm
Packing Size	L170*W50*H29mm
Gross Weight	95 g

### Directives

2014/30/EU	Electromagnetic Compatibility Directive
2014/35/EU	Low Voltage Directive
2011/65/EU	Restriction of Hazardous Substances Directive (RoHS)

### Standards

EN 60950-1	Information technology equipment - Safety - Part 1: General requirements
EN 60950	Particular requirements for d.c. or a.c. supplied electronic control gear for LED modules
ETSI EN 301 489-1 V2.2.0	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; - Part 1: Common technical requirements
ETSI EN 301 489-3 V2.1.1	Specific conditions for Short-Range Devices, frequencies between 9 kHz and 246 GHz
ETSI EN 301 328 V2.1.1	Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz band;
IEC 62479:2010	Assessment of the compliance of low-power electronic and electrical equipment with the basic restrictions related to human exposure to electromagnetic fields (10 MHz to 300 GHz)

