


OPERATING INSTRUCTION OF MINI DIM SENSOR CONTROLLER (911-909)

Technical Parameters

Working temperature	0-45°C	Supply voltage	DC12V-24V
Static power consumption	<1W	Sensor	ITR
Sensor range	0-8CM	Sensor cable	1 meter
External dimension	L48*W26*H13 mm	Packing size	L100*W65*H40mm
Net weight	50g	Gross weight	65g
Output	1 channel	Output current	≤6A
PWM frequency	490Hz	Max. Output power	12V:<72W, 24V:<144W


Dimensions

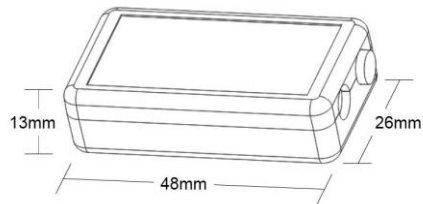

Function

Blocking the sensor like closing the door of furniture in 0-8CM range, output lighting will gradually to off;
Opening the door of furniture, the output light will gradually light up.

Sensor Installation

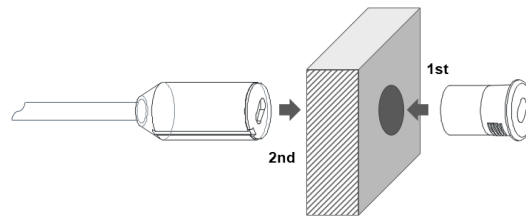

Application Diagram

