

# HIGH EFFICIENCY RECESSED LED LUMINAIRE

CYFELCO REC-PNL-32W-5490LM-4000K-L30W120H75 DALI

PRODUCT DATA



820-321



## General Information

|                                   |  |
|-----------------------------------|--|
| Order Code                        | 820-321  |
| Product Description               | CYFELCO REC-PNL-32W-5490LM-4000K-L30W120H75 DALI                                       |
| Application                       | Offices, shops, educational and public centres, etc.                                   |
| Installation                      | Ceiling type exposed T-bar, plasterboard with accessories 590-001                      |
| Luminaire type                    | Recessed LED Luminaire   |
| Light Source                      | LED modules SMD Vossloh-Schwabe  |
| Number of light sources           | 2 pcs  |
| Light Source Colour               | 4000K, cool white  |
| Driver                            | Built-in Vossloh-Schwabe   |
| Dimming                           | DALI   |
| Energy Class                      | A++  |
| Optical Risk                      | RG 0   |
| Protection class                  | Class I  |
| Ingress protection code           | IP 20 [Finger-protected]   |
| Mechanical impact protection code | IK03   |
| Standards                         | 2014/30/EU Electromagnetic Compatibility Directive<br>2014/35/EU Low Voltage Directive |
| CE mark                           | Yes  |
| Warranty                          | 5 years  |

## Electrical Data

|                 |          |
|-----------------|----------|
| Input Power     | 36 W     |
| Input voltage   | 220-240V |
| Input Frequency | 50-60 Hz |
| Drive Current   | 350 mA   |
| Power Factor    | 0.97     |

## Mechanical Characteristics

|                  |                                 |
|------------------|---------------------------------|
| Housing Material | Sheet steel 0,5mm               |
| Surface Finish   | White powder coating (RAL 9003) |
| Optical Cover    | Opal PMMA                       |

## Initial Performance

|  |               |
|--|---------------|
| Source Luminous Flux                   | 5490 lm       |
| Source Efficacy                        | 170 lm/W      |
| Initial Luminaire Luminous Flux        | 4172 lm       |
| Initial Luminaire Efficacy             | 116 lm/W      |
| Initial Corr. Colour Temperature (CCT) | 4000 K        |
| Initial Color Rendering Index (CRI)    | >80 (Typ. 85) |
| Initial chromaticity                   | SDCM < 3      |

## Logistics

|                        |                     |
|------------------------|---------------------|
| Net weight per piece   | 4.04 kg             |
| Gross weight per piece | 4.61 kg             |
| Volume                 | 0.33 m <sup>3</sup> |
| Packing                | 1 pc per carton     |


## Over Time Performance

|                               |              |
|-------------------------------|--------------|
| Driver Service Life Time      | 100,000 hrs  |
| LED Median Useful Life L80B10 | 60,000 hours |

## Application Conditions

|                             |               |
|-----------------------------|---------------|
| Operating Temperature Range | -20 to +40 °C |
| Average Ambient Temperature | +25 °C        |

## Dimensional Drawing

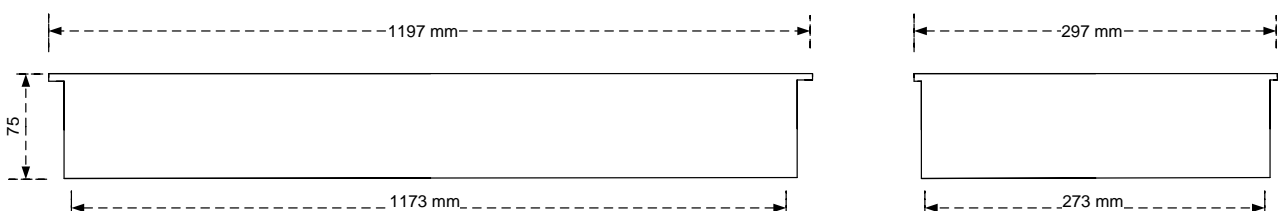

ELMASCO INDUSTRIES S.A.

Head Office : 44 K. Palama, 14343 N. Chalkidona, Athens, Greece

Production Plant : Ag. Adrianos, 21100 Nafplio, Greece

Email: [elmasco@elmasco.eu](mailto:elmasco@elmasco.eu)

Tel : +30 210 2583100

Fax: +30 210 2583107

