



## PREMIUM RANGE HIGH EFFICIENCY COB LED STRIP

911-308 - CYFELCO 3 LSCOB 249.0IP20927 HB

### PRODUCT DATASHEET

High Efficiency Flexible COB LED Strips for General indoor illumination

---


#### Areas of application

- General indoor illumination
- Accent lighting, light advertising, path lighting
- Task lighting, recreation lighting, under-cabinet lighting
- Private living areas

---

#### Product Features

- Flexible and cuttable LED strip
- Easy mounting on many smooth surfaces thanks to self-adhesive tape
- Smallest cuttable unit: 50 mm
- Color rendering index CRI: > 90
- Dimmable with suitable drivers
- Lifetime (L70/B50): up to 50,000 h
- 5 Years Warranty

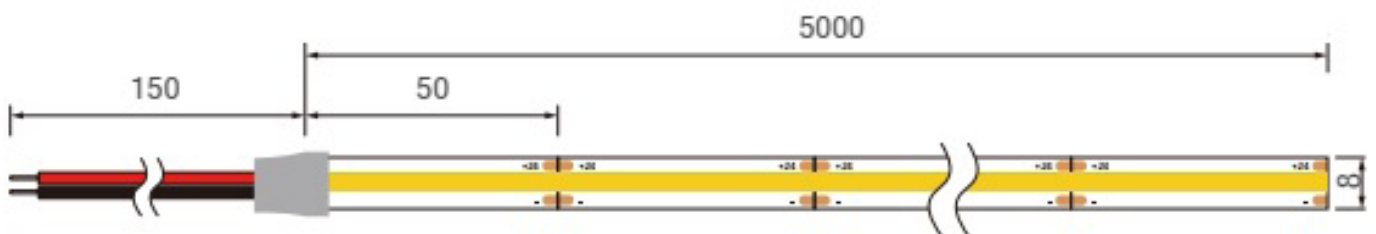

## TECHNICAL DATA

### Operating and Electrical

Input Voltage	<b>24V DC</b>
Nominal Power per meter	<b>9W</b>
Drive Current per meter	0.375 A
LEDs/m	480
LED Chip	Sanan
Width	8 mm
Energy Class	F

### Over Time Performance

Lifespan L70/B50 at 25 °C	>50000 hrs
---------------------------	------------

### Application

Ambient Temperature Range	-20 to +45 °C
Ingress Protection Code	IP20
Application Environment	Indoor
Mounting Type	Via 3M self-adhesive
Dimmable	Yes

### Logistics

Meters per reel	5
Reels per Carton	50
Carton Box Gross Weight	xx Kg
Carton Box Net Weight	xx Kg

### Directives

2014/30/EU	Electromagnetic Compatibility Directive
2011/65/EU	Restriction of Hazardous Substances Directive (RoHS)
2009/125/EU	Ecodesign Requirements for energy-related products

### Standards

EN IEC 55015:2019	Limits and methods of measurement of radio disturbance characteristics of electrical
EN 61547:2009	Equipment for general lighting purposes - EMC immunity requirements
EN IEC 61000-3-2:2019	Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current ≤16 A per phase)
EN 61000-3-3:2013+A1:2019	Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment

### Photometric Data

Luminous Flux per meter	<b>990 Lm</b>
Luminous Efficacy	110 lm/W
Color Temperature	2700 K (Warm White)
Color Rendering Index CRI	>90
SDCM	<5
Flickering metric (Pst LM)	<1
Stroboscopic Effect (SVM)	<0.4
Photobiological safety group	RG 0
Beam Angle	180°

### Mechanical and Housing

Layers	Double-layer FPC(2Oz)
--------	-----------------------